

Construction:

The unit consists of a body. A shade is mounted to the luminary body with a ring. A disk separating electrical compartment from lighting compartment is attached to a luminary body. A LED light source radiator is settled to the disk. LED module is mounted to the radiator and tightly closed with a lens. The module is powered with a voltage power supply. The luminary is sealed with a gasket.

Mounting instructions:

- *) - Screw the radiator to mount an LED light source to the disk.
- Connect the electrical cables according to the scheme.
- Tighten bolts to mount a disk to the luminary body.
- Mount the shade to the body with a ring. Tighten mounting bolts.
- The luminary is mounted to the lantern with a M20 thread (hanged luminary).

If any lantern elements are supplied factory-mounted, the mounting stages marked with *) should be omitted (as this has already been done by the manufacturer).

TECHNICAL DATA:

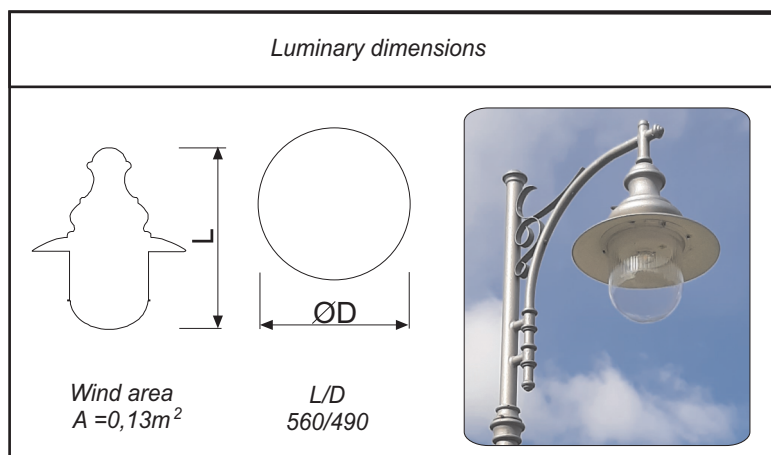
Power: ~230/50Hz

Protective class: I or II

IP66 -electrical part

IP66 -optical part

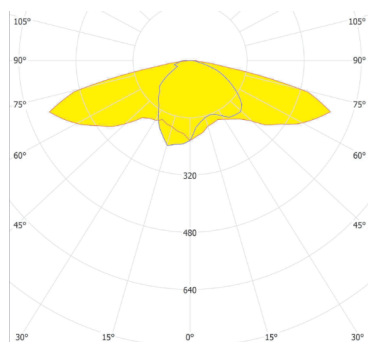
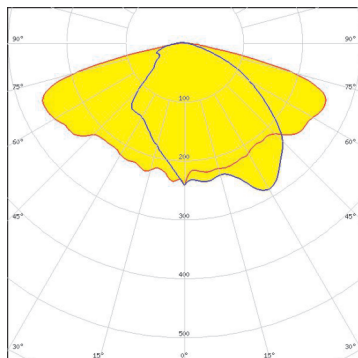
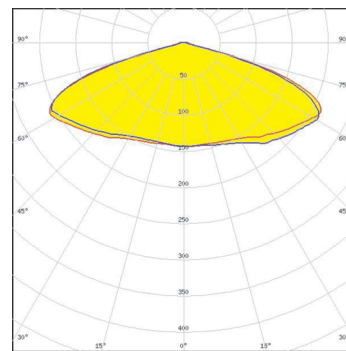
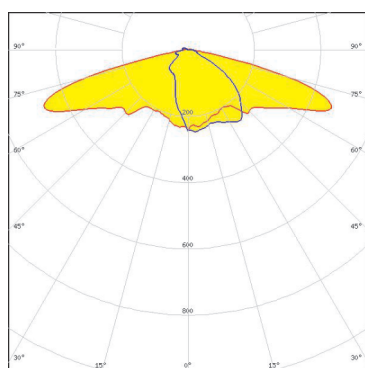
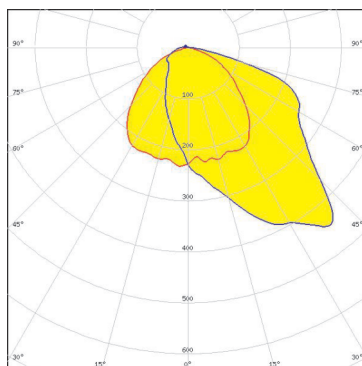
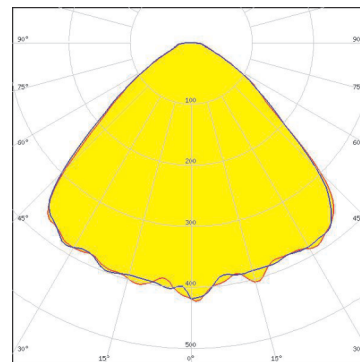
IK07



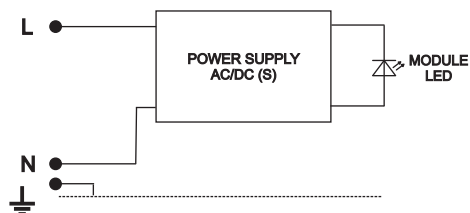
WARNING !! The weight of the unit may slightly differ for individual production batches.

04 ARIES LED

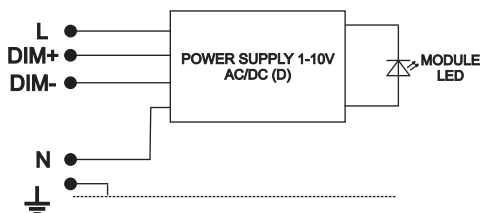
AVAILABLE LENSES:


GT

DWC2

VSM

T2

T4

WWW

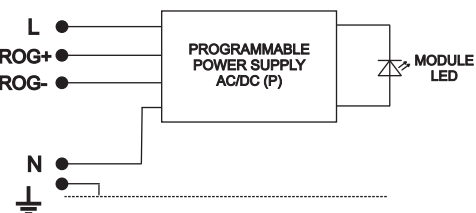
ELECTRICAL DIAGRAMS:



1. Module LED -basic power supply (S)



2. Module LED -dimmable power supply (D)



3. Module LED -programmable power supply (P)

Type	Light-prod. element	Luminous flux[lm]			Light-prod. element	flux[lm]		Weight [kg]	Pn [W]
		2700K (827)	3000K (830)	4000K (840)		2200K (822)			
04L-22W	CMA2550	2881	2990	3170	CXB2540	2051		14,9	22
04L-33W	CMA2550	4189	4286	4609	CXB2540	2982		14,9	33
04L-38W	CMA2550	4733	4842	5207	CXB2540	3369		14,9	38
04L-50W	CMA2550	5993	6131	6593	CXB2540	4266		14,9	50
04L-58W	CMA2550	6740	6896	7415	CXB2540	4797		14,9	58

WARNING !! The weight of the unit may slightly differ for individual production batches.